

HVAC EQUIPMENT SCHEDULE

GENERAL:
 ALL SYSTEM COMPONENTS SHALL BE BY ONE MANUFACTURER & MATCHED FOR SIZE & PERFORMANCE. SYSTEM SHALL INCLUDE ALL ELECTRICAL CONNECTIONS SWITCHES, REFRIGERANT LINES, FILTERS, GRILLS, REGISTERS, FITTINGS & INCIDENTALS REQUIRED FOR PROPER SYSTEM OPERATION. INSTALLATION OF ALL EQUIPMENT AND ACCESSORIES SHALL BE IN ACCORDANCE WITH MFR'S. RECOMMENDATIONS.

HVAC SYSTEM IS A DESIGN-BUILD CONTRACT AND SYSTEM SHOWN IS SCHEMATIC ONLY TO SHOW CAPACITIES AND SCOPE OF WORK. OWNER/CONTRACTOR MAY ELECT TO INSTALL SUPPLY AIR SUPPLY DUCTWORK EITHER IN ATTIC OR IN CRAWL SPACE, SUBJECT TO MAINTAINING CODE CLEARANCES. COORDINATE FOUNDATION WALL PENETRATIONS IF INSTALLATION IS TO BE THROUGH CRAWL SPACE.

HEAT PUMP:
 NOMINAL 2.1/2 TON SPLIT SYSTEM WITH:
 S.E.E.R OF 13.00 OR BETTER PER D.O.E. TEST PROCEDURE
 HSPF OF 8.0 BTU/KWH-HR OR BETTER PER D.O.E. TEST PROCEDURE
 10.00 KW SUPPLEMENTARY ELECTRIC HEAT.

MANUFACTURER & MODEL: LENNOX, TRANE, GE, RUUD, COLMAN, SONY, OR APPROVED.

REGISTERS & GRILLS:
 FLOOR REGISTERS: AIRMATE SERIES 300 OR APPROVED; BROWN ENAMEL FINISHED STEEL WITH MULTI-BLADE DAMPERS
 RETURN AIR FILTER, GRILL: AIRMATE SERIES 100 FF OR APPROVED WHITE ENAMEL FINISHED STEEL FOR 1" FILTER.

THERMOSTAT:
 HONEYWELL, WHITE-ROGERS, OR APPROVED; ELECTRONIC PROGRAMMABLE WITH AUTOMATIC NIGHT SET-BACK; ON, OFF, FAN, AUTO AND HEAT-COOL SWITCHES. AUTO CHANGE-OVER FEATURE OPTIONAL WITH MINIMUM 10 DEG.F. DEADBAND BETWEEN HEATING AND COOLING SETTINGS.

DUCTWORK
 REFER TO SPECIFICATIONS
 MEET 2005 OREGON RESIDENTIAL SPECIALTY CODE FOR DUCT INSULATION GARAGE WALL PENETRATIONS, AND RELATED REQUIREMENTS.
 DUCT SIZES SHOWN ARE MINIMUM. INCREASE 1" IN DIAMETER FOR FLEX DUCTS. INCREASE DUCT SIZES AS REQUIRED BY STATIC PRESSURE CAPACITY OF FAN COIL.

ALL DUCTWORK IN GARAGE AND CRAWL SPACE SHALL BE INSULATED METAL AS SPECIFIED PREFORMED FIBERGLASS OR FIBERGLASS DUCTBOARD NOT ALLOWED IN CRAWL SPACE.
 ALL DUCTS EXPOSED IN GARAGE SHALL BE INSIDE INSULATED METAL. RIGID PREFORMED FIBERGLASS OR FIBERGLASS DUCTBOARD SHALL BE LIMITED TO ATTIC SPACES. UNLESS OTHERWISE APPROVED "FLEX" DUCT SHALL BE LIMITED TO 48" LENGTHS FOR TRANSITIONS AND CONNECTIONS TO REGISTERS AND GRILLS.

ELECTRIC HEATERS & EXHAUST FANS
 SEE FLOOR PLANS FOR ELECTRIC HEATERS IN BATHROOMS.
 SEE FLOOR PLAN FOR EXHAUST FANS.

HVAC SYSTEM ALTERNATE BID

DELETE HEAT PUMP SYSTEM SPECIFIED ABOVE AND SUBSTITUTE GAS/ELECTRIC SYSTEM SPECIFIED BELOW
 HVAC SYSTEM SHALL BE GAS HEATING WITH ELECTRIC AIR CONDITIONING INSTEAD OF HEAT-PUMP SYSTEM SHOWN IN THE DRAWINGS AND SPECIFIED ABOVE.

FURNACE/FANCOIL AND COMPRESSOR LOCATIONS SHALL BE AS SHOWN IN THE DRAWINGS.

FURNACE CAPACITY:
 50,000 BTUH MINIMUM
 PROVIDE COST FOR 80% MINIMUM EFFICIENCY FURNACE AND ALTERNATE COST FOR MINIMUM 90% EFFICIENCY FURNACE.
 OWNER INTENDS TO INVESTIGATE POSSIBILITY OF OBTAINING ENERGY CREDITS FOR MORE EFFICIENT UNITS, AND NEEDS COST DIFFERENCE TO MAKE FINAL DETERMINATION.



AIR CONDITIONING:
 2-1/2 TON (30,000 BTUH) CAPACITY COMPRESSOR AND MATCHED INDOOR COILS.
 13.0 MINIMUM SEER

THERMOSTAT SHALL BE DIGITAL PROGRAMMABLE WITH AUTO CHANGE OVER, AND NIGHT SET-BACK FEATURES.
 PROVIDE CURBS, CONDENSATE DRAINS, PROTECTIVE BOLLARDS, COMBUSTION AIR DUCTING, VENTS, AND OTHER INCIDENTALS AS REQUIRED FOR COMPLETE AND OPERABLE INSTALLATION IN CONFORMANCE WITH APPLICABLE CODES.

HVAC PLAN 2 BEDROOM 960 SF 1/4" = 1'-0"

A7005-960SF-2BR-LA

DALLAS W. HORN, ARCHITECT
 MEMBER - AMERICAN INSTITUTE OF ARCHITECTS
 840 SE ROSE - ROSEBURG, OR 97470
 PHONE: (541) 672-5658
 dwh@rio.com

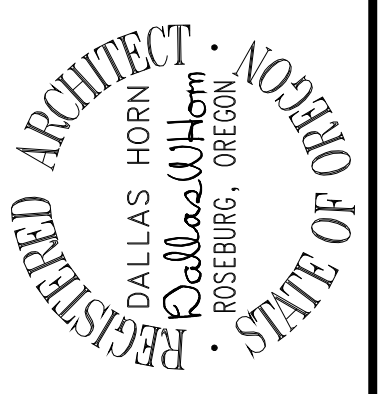

SELF HELP HOUSING - 2 BEDROOM DWELLING LA-1
 DOUGLAS COUNTY, OREGON
 OWNER-DEVELOPER - UMPQUA COMMUNITY DEVELOPMENT CORP.

HVAC PLAN

PROJECT NO. A9803
 LAR6
 DATE 1/21/09

DRAWING SET NO. _____

SHEET NO

6
 OF 8